


# MAHARASHTRA POLLUTION CONTROL BOARD

Tel: 24010437/24020781/24014701		Kalpataru Point, 2 <sup>nd</sup> - 4 <sup>th</sup> Fl.
Fax: 24024068 / 24023516		Opp. Cine Planet Cinema,
Website: <a href="http://mpcb.gov.in">http://mpcb.gov.in</a>		Near Sion Circle, Sion (E)
E-mail: <a href="mailto:mpcb@vsnl.net">mpcb@vsnl.net</a>		Mumbai-400 022.

Red/L.S.I

Date: 04/01/2012

Consent No. BO/JD(WPC)/EIC No. PN-11501 -11, PN-5523-11, PN-4610-11 & PN-5522-10/R/CC-  
CAC-136

Consent to Operate under Section 26 of the Water (Prevention & Control of Pollution) Act, 1974 & under Section 21 of the Air (Prevention & Control of Pollution) Act, 1981 and Authorization / Renewal of Authorization under Rule 5 of the Hazardous Wastes (Management, Handling & Transboundary Movement) Rules 2008

[To be referred as Water Act, Air Act and HW (M&H) Rules respectively].

CONSENT is hereby granted to

M/s. Siddhanath Sugar Mills Ltd.,  
(Sugar & Co-Generation Unit),  
A/p - Tirhe, Tal. - North Solapur  
Dist -Solapur.

located in the area declared under the provisions of the Water Act, Air act and Authorization under the provisions of HW(M&H) Rules and amendments thereto subject to the provisions of the Act and the Rules and the Orders that may be made further and subject to the following terms and conditions:

1. The Consent to Operate is granted for a period up to: 31/10/2012.
2. The Consent is valid for the manufacture of -

Sr. No.	Product Name	Maximum Quantity	UOM
1	Sugar	7500	MT/M
2	Molasses	3000	MT/M
3	Preesmud	2625	MT/M
4	Bagasse	22500	MT/M
5	Electricity	12	MW

### 3. CONDITIONS UNDER WATER ACT:

(i) The daily quantity of trade effluent generated from above activity shall not exceed 585.0 M<sup>3</sup>/Day

(ii) The daily quantity of sewage effluent from the co- generation unit shall not exceed 60.0 M<sup>3</sup>.

(iii) **Trade Effluent: Treatment:** The applicant shall provide comprehensive treatment system consisting of primary / secondary and/or tertiary treatment provided for sugar unit as is warranted with reference to influent quality and operate and maintain the same continuously so as to achieve the quality of the treated effluent to the following standards:

Sr.no	Parameter		Limits
1	pH	Between	5.5 to 9.0
2	BOD 3 days 27 Deg. C	Not to exceed	30 mg/l
3	COD	Not to exceed	250 mg/l
4	Oil & Grease	Not to exceed	10 mg/l
5	TDS	Not to exceed	2100 mg/l.
6	Chlorides	Not to exceed	600 mg/l.
7	Sulphates	Not to exceed	1000 mg/l.
8	SS	Not to exceed	100 mg/l.

(iii) **Trade Effluent Disposal:** The treated industrial effluent shall be recycled/ reused to the maximum extent and remaining shall be used on land for gardening only. There shall not be any discharge directly or indirectly into the water body.

(iv) **Sewage Effluent Treatment:** The applicant shall provide comprehensive treatment system as is warranted with reference to influent quality and operate and maintain the same continuously so as to achieve the quality of treated effluent to the following standards.

- |     |                   |               |     |       |
|-----|-------------------|---------------|-----|-------|
| (1) | Suspended Solids  | Not to exceed | 100 | mg/l. |
| (2) | BOD 3 days 27o C. | Not to exceed | 100 | mg/l. |

(vi) **Sewage Effluent Disposal:** The treated domestic effluent shall be soaked in a soak pit, which shall be got cleaned periodically. Overflow, if any, shall be used on land for gardening / plantation only.

(vii) **Non-Hazardous Solid Wastes:**

Sr. No.	Type Of Waste	Quantity	UOM	Treatment /Disposal
1	Boiler Ash	72.9	MT/day	--Sale to Brick manufacturer---

(viii) **Other Conditions:**

1. Industry should monitor effluent quality regularly.

#### 4. CONDITIONS FOR MOLASSES STORAGE:

- The molasses shall be properly collected and stored in steel tanks which shall be absolutely leak proof. At no stage of handling of molasses, there shall be leakage or spillage.
- The capacity of tanks for storage of molasses shall be such that at no time the molasses shall be required to be stored in kutch pits. Adequate space storage capacity shall be available to take care of bumper production of sugar, non-lifting of molasses etc.
- All the area on which molasses are stored and handled shall be provided with drain for diverting the spills to the treatment plant/ molasses tank. Suitable arrangements for accidental discharges of molasses from the tanks shall be provided to contain the same within factory premises.
- Destruction of molasses and its disposal shall not be done without specific permission in writing from the authorized officer of the Board, intimation of intention to destroy or dispose of the molasses shall be given to the Board at least 15 (fifteen) days in advance by registered post under intimation to the Sub-Regional officer and Regional officer of the Board under whose jurisdiction the factory is situated.
- The storage tanks shall be kept in good conditions all the year round with adequate maintenance. The tanks size and capacity per cm, height, total capacity in tonnes shall be displayed prominently near the tank.

: 3 :

- vi) The above conditions shall be in addition to and not in derogation of the provisions contained in the "Bombay Molasses Rules, 1955" and "Maharashtra Molasses Storage and Supply Regulation, 1965".
- vi) The industry shall monitor effluent quality regularly.

**5. The applicant shall comply with the provisions of the Water (Prevention & Control of Pollution) Cess Act, 1977 (to be referred as Cess Act) and amendment Rules, 2003 there under**

The daily water consumption for the following categories is as under:

(i) Domestic	...	64.0	CMD
(ii) Industrial Processing	...	600.0	CMD
(iii) Industrial Cooling /Boiler	...	620.0	CMD
(iv) Agricultural/Gardening	...	----	CMD

The applicant shall regularly submit to the Board the returns of water consumption in the prescribe form and pay the Cess as specified under Section 3 of the said Act.

**6. CREP Conditions for Sugar Factory:**

**(A) Water Management:-**

- (i) Operation of ETP Shall be started at least one month before starting of cane crushing to achieve desired MLSS. So as to meet prescribed standards from day one the operation of mill.
- ii) Waste water generation shall be reduced to 100 liter per tone of cane crushed.
- iii) Industry shall achieve zero discharge into in land surface water bodies.
- iv) 15 days storage capacity tank shall be provided for treated effluent to take care of no demand for irrigation.

(B) Emission Control: ESP/ Bag Filter/ Ventury Scrubber shall be installed to comply with standards for particulate matter emission to < 150 mg/Nm<sup>3</sup>.

**7. CONDITIONS UNDER AIR ACT:**

- (i) The applicant shall install a comprehensive control system consisting of control equipments as is warranted with reference to generation of emission and operate and maintain the same continuously so as to achieve the level of pollutants to the following standards:

**A) Control Equipment:**

- i) ESP/Ventury scrubber of sufficient capacity shall be provided to Bagasse fired boiler.
- ii) ESP/Bag filter/ Ventury scrubber/ Dust collector of sufficient capacity shall be provided to sugar bagging section.

**B) Standard for Emission of Air Pollutants**

(a) SPM	Not to Exceed	150 mg/Nm <sup>3</sup>
(b) SO <sub>2</sub>	Not to Exceed	5.8 T/Day

**C) Conditions for D.G. Set**

- a. Noise from the D.G. Set should be controlled by providing an acoustic enclosure or by treating the room acoustically.
- b. Industry should provide acoustic enclosure for control of noise. The acoustic enclosure/ acoustic treatment of the room should be designed for maximum 25 dB (A) insertion loss or for meeting the ambient noise standards, whichever is on higher side. A suitable exhaust muffler with insertion loss of 25 dB (A) shall also be provided. The measurement of insertion loss will be done at different points at 0.5 meters from acoustic enclosure/room and then average.

- c. The industry shall take adequate measures for control of noise levels from its own sources within the premises in respect of noise to less than 55 dB(A) during day time and 45 dB(A) during the night time. Day time is reckoned between 6 a.m. to 10 p.m and night time is reckoned between 10 p.m to 6 a.m.
- d. Industry should make efforts to bring down noise level due to DG set, outside industrial premises, within ambient noise requirements by proper siting and control measures.
- e. Installation of DG Set must be strictly in compliance with recommendations of DG Set manufacturer.
- f. A proper routine and preventive maintenance procedure for DG set should be set and followed in consultation with the DG manufacturer which would help to prevent noise levels of DG set from deteriorating with use
- g. D.G. Set shall be operated only in case of power failure
- h. The applicant should not cause any nuisance in the surrounding area due to operation of D.G. Set.

**(ii) The Applicant shall observe the following fuel pattern**

Sr No	Type of Fuel	Quantity
1	Bagasse	581 T/day.

**(iii) The applicant shall erect the chimney(s) of the following specifications**

Sr No	Chimney Attached to	Height in Mtrs
1	Boiler	65.0 mtrs.

- (v) The applicant shall provide ports in the chimney/(s) and facility such as ladder, platform etc for monitoring of air emissions and the same shall be open for inspection to/and for use of the board's staff. The chimney(s) vents attached to various sources of emission shall be designed by numbers such as S-1, S-2 etc. and these shall be painted /displayed to facilities identification.
- (vi) The industry shall take adequate measures for control of noise levels from its own sources within the premises so as to maintain ambient air quality standard in respect of noise to less than 75 dB(A) during day time and 70 dB(A) during night time. Day time is reckoned in between 6 a.m. and 10 p.m. and night time is reckoned between 10 p.m. and 6 a.m.
- (vi) **Other Condition**
  - (a) The Bagasse handling system shall be covered with proper hooding and ventilation arrangements connected to dust suppress agent so as not to allow any fugitive emissions.
  - (b) The Industry should not cause any nuisance in surrounding area.
  - (c) The industry shall monitor stack emissions and ambient air quality regularly.
  - (d) The industry shall install continuous monitoring equipment for stack emission analysis and submit the report on fortnightly basis to the respective Regional office/ Sub Regional Office.
  - (e) Applicant shall install one continuous automatic ambient air and micrometeorological monitoring station at prominent downwind direction indicated by state board to be set up and operate at its own cost, measure So<sub>2</sub>, NO<sub>x</sub> and particulate matter. These CAAQMS shall also have necessary provision of networking to the Air Quality Monitoring network of MPCB.

**8. CONDITIONS UNDER HAZARDOUS WASTE (MANAGEMENT, HANDLING & TRANSBOUNDRY MOVEMENT) RULES, 2008:**

- (i) The Industry shall handle hazardous wastes as specified below.

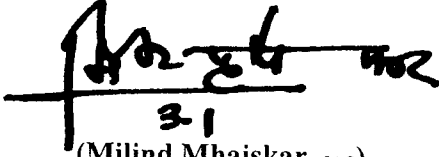
Sr. No	Type Of Waste	Quantity	UOM	Disposal
1	5.1 Used Oil/Spent Oil	10	Kg/M	Sale to authorized Reprocessor

9. Whenever due to any accident or other unforeseen act or even, such emissions occur or is apprehended to occur in excess of standards laid down, such information shall be forthwith Reported to Board, concerned Police Station, office of Directorate of Health Services, Department of Explosives, Inspectorate of Factories and Local Body. In case of failure of pollution control equipments, the production process connected to it shall be stopped.

**10. Industry shall comply with following additional conditions:**

- i. The applicant shall maintain good housekeeping and take adequate measures for control of pollution from all sources so as not to cause nuisance to surrounding area / inhabitants.
  - ii. The applicant shall bring minimum 33% of the available open land under green coverage/ tree plantation.
  - iii. Solid waste – The non hazardous solid waste arising in the factory premises, sweepings, etc., be disposed of scientifically so as not to cause any nuisance / pollution. The applicant shall take necessary permissions from civic authorities for disposal to dumping ground.
  - iv. The applicant shall provide for an alternate electric power source sufficient to operate all pollution control facilities installed by the applicant to maintain compliance with the terms and conditions of the consent. In the absence, the applicant shall stop, reduce or otherwise, control production to abide by terms & conditions of this consent regarding pollution levels.
  - v. The applicant shall not change or alter quantity, quality, the rate of discharge, temperature or the mode of the effluent / emissions or hazardous wastes or control equipments provided for without previous written permission of the Board.
  - vi. The applicant shall provide facility for collection of environmental samples and samples of trade and sewage effluents, air emissions and hazardous wastes to the Board staff at the terminal or designated points and shall pay to the Board for the services rendered in this behalf.
  - vii. **The applicant shall make an application for renewal of the consent at least 60 days before the date of the expiry of the consent.**
  - viii. The firm shall submit to this office, the 30<sup>th</sup> day of September every year, the Environmental Statement Report for the financial year ending 31<sup>st</sup> March in the prescribed Form-V as pre the provisions of rule 14 of the Environment (Protection) (Second Amendment) Rules, 1992.
  - ix. As inspection book shall be opened and made available to the Board's officers during their visit to the applicant.
  - ix. The applicant shall install a separate electric meter showing the consumption of energy for operation of domestic and industrial effluent treatment plants and air pollution control system. A register showing consumption of chemicals used for treatment shall be maintained.
  - Xi. Separate drainage system shall be provided for collection of trade and sewage effluents. Terminal manholes shall be provided at the end of collection system with arrangement for measuring the flow. No effluent shall be admitted in the pipes / sewers down- stream of the terminal manholes. No effluent shall find its way other than in designed and provided collection System.
  - xii. Neither storm water nor discharge from other premises shall be allowed to mix with the effluents from the factory.
  - xiii. The Industry shall ensure that fugitive emissions from the activity are controlled so as to maintain clean and safe environment in and around the factory premises.
11. The Industry shall comply with the hazardous Waste (Management, Handling & Trans Boundary Movement) Rules, 2008.

12. This Board reserves the right to amend or add any conditions in this consent and the same shall be binding on the applicant.
13. Industry shall submit performance Bank Guarantee of Rs. 5.0 Lakhs towards the Operation & Maintenance of ETP and Air Pollution Control devises so as to achieve the consented standards and Bank Guarantee of Rs. 2.0 Laks towards providing necessary arrangements to cover the effluent collection system and to avoid the ingress of bagasse and other materials within Six Months i.e upto June, 2012. The Bank Guarantees shall be submitted within 15 days at Regional Office Pune.
14. The Gross Capital investment of the industry is Rs. 110.0 Crore ( C.I of the Sugar Plant is Rs. 48.0 Crs. and C.I of the Co- generation Plant is Rs. 62.00 Crs.)
15. The Consent is issued pursuant to the decision of Consent Appraisal committee meeting held on 15/12/2011.

  
 31  
 (Milind Mhaikar, IAS)  
 Member Secretary

To,

M/s. Siddhanath Sugar Mills Ltd.,  
 (Sugar & Co-Generation Unit),  
 A/p - Tirhe, Tal. – North Solapur  
 Dist ; Solapur.

Copy to:

RO- MPCB Pune /SRO Solapur –They are directed to ensure the compliance of the consent conditions.  
 /CAO/Cess Branch/Master File

Received Consent fee of –

Sr. No.	Amount(Rs.)	DD. No.	Date	Drawn On
1	75000/-	712050	9/09/2011	Axis Bank Ltd.
2	50,000/-	003565	29/01/2010	Brahmadeodada Mane Sahakari Bank Ltd.,
3.	75,000/-	003566	29/01/2010	Brahmadeodada Mane Sahakari Bank Ltd.,
4	50000/-	712048	09/09/2011	Axis Bank Ltd.
5.	50,000/-	712062	20/09/2011	Axis Bank Ltd.
6	25,000/-	712086	07/12/2011	Axis Bank Ltd.
7	25,700/-	866005	26/12/2011	Axis Bank Ltd.