

MAHARASHTRA POLLUTION CONTROL BOARD

Tel: 24010437/24020781/24014701

Fax: 24024068 / 24023515

Website: <http://mpcb.mah.nic.in>

E-mail: mpcb@vsnl.net

Red/SSI

Consent No. BO/PCI-III/ PN-10086-11/O/B- CC-195



Kalpataru Point, 2nd - 4th Floor
Opp. Cine Planet Cinema,
Near Sion Circle, Sion (E)
Mumbai-400 022.

Date: 04/02/2012

Consent to Operate under Section 26 of the Water (Prevention & Control of Pollution) Act, 1974 & under Section 21 of the Air (Prevention & Control of Pollution) Act, 1981 and Authorization / Renewal of Authorization under Rule 5 of the Hazardous Wastes (Management, Handling & Transboundary Movement) Rules 2008 [To be referred as Water Act, Air Act and HW(M, H & T) Rules respectively].

CONSENT is hereby granted to

**M/s. Govind Milk & Milk Products Pvt. Ltd.,
Gat No. 93, 94 & 95 A/p – Kolki, Tal – Phaltan
Dist – Satara.**

located in the area declared under the provisions of the Water Act, Air act and Authorization under the provisions of HW(M, H & T) Rules there subject to the provisions of the Act and the Rules and the Orders that may be made further and subject to the following terms and conditions:

1. The Consent to Operate is granted up to – 31/12/2012

2. The consent is valid for the manufacture of –

Sr. No.	Product	Maximum Quantity
1	Pasteurized Milk	200000 lit./day
2	Concentrated Milk	5000 lit./day
3	Milk Powder	35 MT/day
4	Milk by product	5 MT/day
5	Ice making	25 MT/day

3. CONDITIONS UNDER WATER ACT:

- (i) The daily quantity of trade effluent from the factory shall not exceed 465 M³.
(ii) The daily quantity of sewage effluent from the factory shall not exceed 8.5 M³.

(iii) **Trade Effluent:**

Treatment : The applicant shall provide comprehensive treatment system consisting of primary / secondary and/or tertiary treatment as is warranted with reference to influent quality and operate and maintain the same continuously so as to achieve the quality of the treated effluent to the following standards :

1)	pH	Between	5.5 to 9.0
2)	Suspended Solids	Not to exceed	100 mg/l.
3)	BOD 3 days 27 Deg. C.	Not to exceed	100 mg/l.
4)	COD	Not to exceed	250 mg/l.
5)	Oil & Grease	Not to exceed	10 mg/l.
6)	T.D.S.	Not to exceed	2100 mg/l.

(i) **Trade Effluent Disposal** : The treated trade effluent shall be reused in the cooling system to the maximum extent possible and excess may be used on land for irrigation within factory premises.

(v) **Sewage Effluent Treatment** : The applicant shall provide comprehensive treatment system as is warranted with reference to influent quality and operate and maintain the same continuously so as to achieve the quality of treated effluent to the following standards.

(1)	Suspended Solids	Not to exceed	100 mg/l.
(2)	BOD 3 days 27 Deg. C.	Not to exceed	100 mg/l.

(vi) **Sewage Effluent Disposal** : The treated effluent shall be connected to soak pit, which shall be got cleaned periodically. Overflow, if any, shall be used on land for gardening only.

(vii) **Other Conditions** : The industry should monitor effluent quality regularly

4. The applicant shall comply with the provisions of the Water (Prevention & Control of Pollution) Cess Act, 1977 (to be referred as Cess Act) and Rules thereunder :

The daily water consumption for the following categories is as under:

(i) Domestic	...	10.5	CMD
(ii) Industrial Processing	...	600	CMD
(iii) Industrial Cooling	...	----	CMD
(iv) Agriculture/Gardening	...	----	CMD

The applicant shall regularly submit to the Board the returns of water consumption in the prescribed form and pay the Cess as specified under Section 3 of the said Act.

5. **CONDITIONS UNDER AIR ACT :**

(i) The applicant shall install a comprehensive control system consisting of control equipments as is warranted with reference to generation of emission and operate and maintain the same continuously so as to achieve the level of pollutants to the following standards :

Control Equipment : Fly ash arrestor is to be provided to bagasse boiler

Standards for Emissions of Air Pollutants :

(i)	SPM	Not to exceed	150	mg/Nm ³
(ii)	SO ₂	Not to exceed	162	kg/day

(ii) The applicant shall observe the following fuel pattern :-

Sr. No.	Type of Fuel	Quantity
1	Furnace Oil	1800 lit./day
2	Bagasse	82 MT/day
3	Wood	2 MT/day
4	HSD	4400 lit/day

(iii) The applicant shall erect the chimney(s) of the following specifications :-

Sr. No.	Chimney attached to	Height in Meters
1	Boiler (2 Nos)	30
2	Boiler	40
3	Boiler	20
4	Hot Water Generator	20
5	Hot air generator	2.5 *
6	D.G. Set 120 KVA	4.5*
7	D.G. Set 160 KVA	4.5*
8	D.G. Set 400 KVA	4.5*
9	D.G. Set 600 KVA (2 nos)	6 *

* - Meters above the roof

The applicant should provide ports in the chimney(s) and facilitates such as ladder, platform etc. For monitoring the air emissions and the same should be open for inspection to/and for use of the Board's Staff. The chimney(s) vents attached to various sources of emission should be designated by numbers such as S-1, S-2, etc. And these should be painted / displayed to facilitate identification.

: 3 :

- (ii) The industry should take adequate measures for control for noise levels from its own sources within the premises so as to maintain ambient air quality standard in respect of noise to less than 75 dB(A) during day time and 70 dB(A) during night time. Day time is reckoned in between 6 a.m. And 10 p.m. And night time is reckoned between 10 p.m. And 6 p.m.
- (v) Other Conditions : 1) **The industry should not cause any nuisance in surrounding area.** 2) The industry should monitor stack emissions and ambient air quality regularly from MoEF approved laboratory.

Conditions for D.G. Set :-

- 1] Noise from the D.G. Set should be controlled by providing an acoustic enclosure or by treating the room acoustically.
- 2] Industry should provide acoustic enclosure for control of noise. The acoustic enclosure/acoustic treatment of the room should be designed for minimum 25 dB(A) insertion loss or for meeting the ambient noise standards, whichever is on higher side. A suitable exhaust muffler with insertion loss of 25 dB(A) shall also be provided. The measurement of insertion loss will be done at different points at 0.5 metres from acoustic enclosure/room and then average.
- 3] The industry shall take adequate measures for control of noise levels from its own sources within the premises in respect of noise to less than 55 dB(A) during day time and 45 dB(A) during the night time. Day time is reckoned between 6 a.m. to 10 p.m and night time is reckoned between 10 p.m to 6 a.m.
- 4] Industry should make efforts to bring down noise level due to DG set, outside industrial premises, within ambient noise requirements by proper siting and control measures.
- 5] Installation of DG Set much be strictly in compliance with recommendations of DG Set manufacturer.
- 6] A proper routine and preventive maintenance procedure for DG set should be set and followed in consultation with the DG manufacturer which would help to prevent noise levels of DG set from deteriorating with use.
- 7] D.G. Set shall be operated only in case of power failure.
- 8] The applicant should not cause any nuisance in the surrounding area due to operation of D.G. Set.

6. CONDITIONS UNDER HAZARDOUS WASTE (Management ,Handling & Transboundary Movement) RULES, 2008 :

The applicant should not generate any kind of hazardous waste.

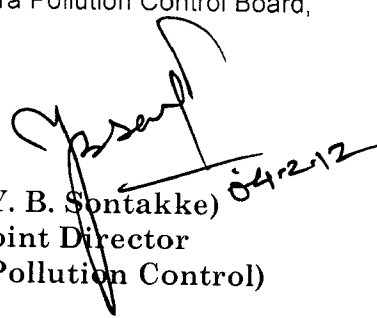
7. Whenever due to any accident or other unforeseen act or even, such emissions occur or is apprehended to occur in excess of standards laid down, such information should be forthwith Reported to Board, concerned Police Station, office of Directorate of Health Services, Department of Explosives, Inspectorate of Factories and Local Body. In case of failure of pollution control equipments, the production process connected to it should be stopped.
8. **General Conditions:**
 - (i) The applicant should bring minimum 33% of the available open land under green coverage/ plantation. The applicant should submit a yearly statement by 30th September every year on available open plot area, no. of trees surviving as on 31st March of the year and no. of trees planted by September end.
 - (ii) The applicant should provide for an alternate electric power source sufficient to operate all pollution control facilities installed by he applicant and operate the same in case of power failure to maintain compliance with the terms and conditions of the consent. In the absence of same, the applicant should stop, reduce or otherwise, control production to abide by terms & conditions of this consent regarding pollution levels.
 - (iii) The applicant should make an application for renewal of the consent at least 60 days before the date of the expiry of the consent. The applicant should not change or alter quantity, quality, the rate of discharge, temperature or the mode of the effluent/ emissions or hazardous wastes or control equipments provided for without previous written permission of the Board.
 - (iv) The firm should submit MPCB, the Environmental Statement Report for the financial year ending 31st March in the prescribed Form-V as pre the provisions of rule 14 of the Environment (Protection) (Second Amendment) Rules, 1992 before 30th September every year.

: 4 :

- (v) The applicant should install a separate meter showing the consumption of energy for operation of domestic and industrial effluent treatment plants and air pollution control system. A register showing consumption of chemicals used for treatment should be maintained. The applicant should also submit a comparative statement of designed power and chemical consumptions vis-a vis actual power and chemical consumption along with Environmental statement.
- (vi) Separate drainage system should be provided for collection of trade and sewage effluents. Terminal manholes should be provided at the end of collection system with arrangement for measuring the flow. No effluent should be admitted in the pipes/sewers down- stream of the terminal manholes. No effluent should find its way other than in designed and provided collection system. Neither storm water nor discharge from other premises should be allowed to mix with the effluents from the factory.
- (vii) The applicant should provide facility for collection of environmental samples and samples of trade and sewage effluents, air emissions and hazardous wastes to the Board staff at the terminal or designated points and should pay to the Board for the services rendered in this behalf. An inspection book should be opened and made available to the Board's officers during their visit to the applicant.
- (viii) The industry should ensure that fugitive emissions from the activity are controlled so as to maintain clean and safe environment in and around the factory premises.
- (ix) The applicant should maintain good house keeping and take adequate measures for control of pollution from all sources so as not to cause nuisance to surrounding area / inhabitants.
8. **This consent shall not be construed as any exemption from obtaining necessary No Objection Certificate from other Government agencies as may deemed fit necessary.**
9. **The capital investment of the industry is Rs. .37.06Crore.**
10. **This Consent is issued as per the decision taken in the meeting of the Consent Committee of the Board held on 25/08/2011.**

This is issued as per Office Note dated 02/02/2012, approved by Hon'ble Chairman.

For and on Behalf of the
Maharashtra Pollution Control Board,


(Dr. Y. B. Sontakke) 04/2/12
Joint Director
(Water Pollution Control)

To,
M/s. Govind Milk & Milk Products Pvt. Ltd.,
Gat No. 93, 94 & 95 A/p – Kolki, Tal – Phaltan
Dist – Satara.
Copy to:
RO-Pune /SRO-Satara / CAO / Cess Branch / Master File

Received Consent fee of –

Amount	D.D. No.	Date	Bank
50,000/-	001749	20/02/2011	IDBI
5,000/-	002147	14/03/2011	IDBI
50,000/-	001949	01/03/2011	IDBI
50,000/-	003274	15/09/2011	IDBI
25,000/-	003539	18/10/2011	IDBI
8630/-	006812	08/12/2011	IDBI