

# MAHARASHTRA POLLUTION CONTROL BOARD

Phone : 4010437/4020781  
/4037124/4035273  
Fax : 24044532/4024068 /4023516  
Email : enquiry@mpcb.gov.in  
Visit At : <http://mpcb.gov.in>



Kalpataru Point, 3rd & 4th floor, Sion- Matunga  
Scheme Road No. 8, Opp. Cine Planet Cinema, Near  
Sion Circle, Sion (E),

Mumbai - 400 022

11/04/2012

Red/L.S.I

Date: /03/2012

Consent No: BO/PAMS/R/EIC NO.RD-1763-10/CC-305

Consent to Operate under Section 26 of the Water (Prevention & Control of Pollution) Act, 1974 & under Section 21 of the Air (Prevention & Control of Pollution) Act, 1981 and Authorization / Renewal of Authorization under Rule 5 of the Hazardous Wastes (Management, Handling & Transboundary Movement) Rules 2008

[To be referred as Water Act, Air Act and HW (M&H) Rules respectively].

CONSENT is hereby granted to

M/s Sudarshan Chemical Industries Ltd.  
Plot No. 19 -A/1 & 2, MIDC Mahad,  
Dist- Raigad.

located in the area declared under the provisions of the Water Act, Air act and Authorization under the provisions of HW(M&H) Rules and amendments thereto subject to the provisions of the Act and the Rules and the Orders that may be made further and subject to the following terms and conditions:

1. The Consent to Operate is granted for a period up to: 31/12/ 2012 with the condition to containment of Pigment powder has to be managed to the maximum possible extent, Housekeeping shall in improved.
2. The Consent is valid for the manufacture of -

Sr. No.	Product Name	Maximum Quantity	UOM
1	Pigments (Pthalo Blue /Green Pigments, Organic Pigments, Inorganic Pigments, Mica Pearl Pigments)	730.0	MT/M
	<b>BY Products</b>		
1	Sulphuric Acid (15-25 %)	2500.00	MT/M
2	Phosphoric Acid (12-15 %)	500.00	MT/M
3	Chemical Gypsum (CaSO4)	500.00	MT/M
4	Aluminum Chloride (5-15%)	1500.00	MT/M
5	Recovered Pigments	25.00	MT/M
6	Phosphoric Acid (30-35 %)	200.00	MT/M
7	Recovered Solvant	100.00	MT/M

### 3. CONDITIONS UNDER WATER ACT:

(i) The daily quantity of trade effluent from the factory shall not exceed 4072.0 M<sup>3</sup>.  
(Trade effluent quantity is reduced from 4191 CMD to 4072 CMD on account of resource recovery. Further 10 % of treated effluent i.e. 407 CMD shall be recycled and reused in the process by 31.12.2012 and after this period the dischargeable industrial effluent will be 3665 CMD.

(ii) The daily quantity of sewage effluent from the factory shall not exceed 141.0 M<sup>3</sup>.

(iii) **Trade Effluent :**

Treatment: The applicant shall provide comprehensive treatment system consisting of primary / secondary and/or tertiary treatment as is warranted with reference to influent quality and operate and maintain the same continuously so as to achieve the quality of the treated effluent to the following standards:

1	pH	Between	5.5 to 9.0
2	BOD 3 days 27 deg C	Not to exceed	100.0 mg/l
3	Oil & Grease	Not to exceed	10.0 mg/l
4	Suspended Solids	Not to exceed	100.0 mg/l.
5	COD	Not to exceed	250.0 mg/l.
6	Hexavalent Chromium	Not to exceed	0.1 mg/l.
7	Total Chromium	Not to exceed	2.0 mg/l.
8	Phenolic Compound	Not to exceed	1.0 mg/l.
9	Copper	Not to exceed	3.0 mg/l.
10	Zinc	Not to exceed	2.0 mg/l.
11	Nickel	Not to exceed	3.0 mg/l.
12	Cadmium	Not to exceed	2.0 mg/l.
13	Mercury	Not to exceed	0.01 mg/l.

(iv) **Trade Effluent Disposal:** The treated trade effluent shall be recycled / reused to the maximum extent in the process and remaining treated effluent shall be sent to CETP.

(v) **Sewage Effluent Treatment:** The applicant shall provide comprehensive treatment system as is warranted with reference to influent quality and operate and maintain the same continuously so as to achieve the quality of treated effluent to the following standards.

- (1) Suspended Solids Not to exceed 100 mg/l.
- (2) BOD 3 days 27o C Not to exceed 100 mg/l.

(vi) **Sewage Effluent Disposal:** The treated domestic effluent shall be soaked in a soak pit, which shall be got cleaned periodically. Overflow, if any, shall be used on land for gardening / plantation only.

(vii) **Non-Hazardous Solid Wastes:**

Sr. No.	Type Of Waste	Quantity	UOM	Disposal
1	Paper /Canteen waste	3600.00	Kg/Yr	Composting
2	Mica Waste	1800.00	MT/Yr	Sale /CHWTSDF
3	Rubber, Hand Gloves, PVC Shoes, Tarpoline, paper bags	1000.00	Kg/Yr	Recycle/sale after decontamination
4	Broken discarded Glass	500.00	Kg/Yr	sale after decontamination
5	Boiler soot / Incinerator Ash (Ash generated from burning of paper only)	500.00	Kg/Yr	Recycle/recycle for making cow dung cakes/ CHWTSDF
6	Insulating material	1000.00	Kg/Yr	Sale /Recycle /Return to vendor / CHWTSDF
7	Excess biomass from ETP	200.00	Kg/Yr	Used as Bio Fertilizers / compost

(viii) **Other Conditions:** Industry should monitor effluent quality regularly.

**4. The applicant shall comply with the provisions of the Water (Prevention & Control of Pollution) Cess Act, 1977 (to be referred as Cess Act) and amendment Rules, 2003 there under**

The daily water consumption for the following categories is as under:

(i) Domestic purpose	...	172.00	CMD
(ii) Water gets Polluted & Pollutants are Biodegradable	...	4635.00	CMD
(iii) Water gets Polluted, Pollutants are not Biodegradable & Toxic	...	0.00	CMD
(iv) Industrial Cooling, spraying in mine pits or boiler feed	...	245.00	CMD
(v) Plantation / Gardening	...	41.00	CMD

The applicant shall regularly submit to the Board the returns of water consumption in the prescribed form and pay the Cess as specified under Section 3 of the said Act.

**5. CONDITIONS UNDER AIR ACT:-**

(i) The applicant shall install a comprehensive control system consisting of control equipments as is warranted with reference to generation of emission and operate and maintain the same continuously so as to achieve the level of pollutants to the following standards:

**a. Control Equipment:**

- I. Scrubber of sufficient capacity shall be provided to reactor / process section and any other source of gaseous emission.
- II. Dust collector of adequate capacity shall be provided to dryer & any other source of particulate emissions.
- III. There shall not be any secondary (fugitive) emissions.

**b. Standards for Emissions of Air Pollutants:**

(i) SPM/TPM	Not to exceed	150.0 mg/Nm <sup>3</sup>
(ii) SO <sub>2</sub>	Not to exceed	450.0 Kg/day
(iii) HCL	Not to exceed	35.0 ppm
(iv) CL <sub>2</sub>	Not to exceed	3.0 ppm
(v) NH <sub>3</sub>	Not to exceed	50.0 ppm

**6. Standards for Stack Emissions:**

(i) The applicant shall observe the following fuel pattern:-

Sr. No.	Type Of Fuel	Quantity	UOM
01	Furnace Oil	8.00	MT/Day
02	Diesel	2.50	KL/M
03	Coal	25.00	MT/Day
04	Briquette	25.00	MT/Day
05	LDO	1.00	MT/Day

- (ii) The applicant shall erect the chimney(s) of the following specifications:-

Sr. No.	Chimney Attached To	Height in Mtrs.
01	Boiler	36.00
02	HCL Scrubber	20.00
03	Thermopack	23.00
04	Incinerator	32.00
05	Ammonia Scrubber	20.00
06	Chlorine Scrubber	20.00
07	D G Set ( 1000 KVA)	4.5*

\* installed above the roof of bldg.

- (iii) The applicant shall provide ports in the chimney/(s) and facilities such as ladder, platform etc. for monitoring the air emissions and the same shall be open for inspection to/and for use of the Board's Staff. The chimney(s) vents attached to various sources of emission shall be designated by numbers such as S-1, S-2, etc. and these shall be painted/ displayed to facilitate identification.
- (iv) The industry shall take adequate measures for control of noise levels from its own sources within the premises so as to maintain ambient air quality standard in respect of noise to less than 75 dB(A) during day time and 70 dB(A) during night time. Day time is reckoned in between 6 a.m. and 10 p.m. and night time is reckoned between 10 p.m. and 6 a.m.
- (vi) Other Conditions:
- 1) The industry should not cause any nuisance in surrounding area.
  - 2) The industry should monitor stack emissions and ambient air quality Regularly.

#### 7. Conditions for D.G. Set

- a. Noise from the D.G. Set should be controlled by providing an acoustic enclosure or by treating the room acoustically.
- b. Industry should provide acoustic enclosure for control of noise. The acoustic enclosure/ acoustic treatment of the room should be designed for minimum 25 dB (A) insertion loss or for meeting the ambient noise standards, whichever is on higher side. A suitable exhaust muffler with insertion loss of 25 dB (A) shall also be provided. The measurement of insertion loss will be done at different points at 0.5 meters from acoustic enclosure/room and then average.
- c. The industry shall take adequate measures for control of noise levels from its own sources within the premises in respect of noise to less than 55 dB(A) during day time and 45 dB(A) during the night time. Day time is reckoned between 6 a.m. to 10 p.m and night time is reckoned between 10 p.m to 6 a.m.
- d. Industry should make efforts to bring down noise level due to DG set, outside industrial premises, within ambient noise requirements by proper siting and control measures.
- e. Installation of DG Set must be strictly in compliance with recommendations of DG Set manufacturer.

- f. A proper routine and preventive maintenance procedure for DG set should be set and followed in consultation with the DG manufacturer which would help to prevent noise levels of DG set from deteriorating with use.
- g. D.G. Set shall be operated only in case of power failure.
- h. The applicant should not cause any nuisance in the surrounding area due to operation of D.G. Set

**8. CONDITIONS UNDER HAZARDOUS WASTE (MANAGEMENT, HANDLING & TRANSBOUNDRY MOVEMENT) RULES, 2008:**

- (i) The Industry shall handle hazardous wastes as specified below.

Sr. No.	Type Of Waste	Quantity	UOM	Disposal
01	5.1 Used / Spent Oil	1000.00	Lit/Yr	Sale to MoEF / MCPB authorized party or Sent to CHWTSDF
02	34.3 Chemical sludge from WWT	500.00	MT/Yr	CHWTSDF
03	15.2 Discarded asbestos sheet / Gasket / Rope	1.2	MT/Yr	CHWTSDF
04	35.1 Filter Cloth / bag	10	MT/Yr	CHWTSDF
05	33.3 Discarded containers / liners	4500.00	Nos/Yr	Sale /recycle arty or Sent to CHWTSDF
06	33.1 Contaminated Residue	0.1	MT/Yr	CHWTSDF
07	20.2 Spent Solvent / Recovered solvent	50.00	Lit/Yr	Sale to MoEF / MCPB authorized party or Sent to CHWTSDF
08	35.3 Spent Carbon	200.00	Kg/Yr	CHWTSDF
09	5.2 Contaminated /oil soaked cotton	250.00	Kg/Yr	CHWTSDF

- (ii) Treatment: -NIL

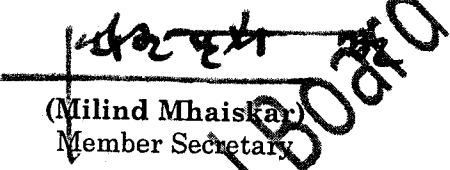
- 9. Whenever due to any accident or gas leakage or other unforeseen act or even, such emissions occur or is apprehended to occur in excess of standards laid down, such information shall be forthwith Reported to Collector, Directorate of Industry, Safety and Health, Police Station, Fire Brigade, Directorate of Health Services, Department of Explosives, Board and Local Body and the production process should be stopped by taking all necessary safety measures. The industry shall also monitor the emission and ensure that the emissions do not cause any harm or nuisance in the surrounding. The industry should not restart the process without permission of the Board and other statutory organization as require under the law.

**10. Industry shall comply with following additional conditions:**

- i. The applicant shall maintain good housekeeping and take adequate measures for control of pollution from all sources so as not to cause nuisance to surrounding area / inhabitants.

- ii. The applicant shall bring minimum 33% of the available open land under green coverage/ tree plantation.
- iii. Solid waste – The non hazardous solid waste arising in the factory premises, sweepings, etc., be disposed of scientifically so as not to cause any nuisance / pollution. The applicant shall take necessary permissions from civic authorities for disposal to dumping ground.
- iv. The applicant shall provide for an alternate electric power source sufficient to operate all pollution control facilities installed by he applicant to maintain compliance with the terms and conditions of the consent. In the absence, the applicant shall stop, reduce or otherwise, control production to abide by terms & conditions of this consent regarding pollution levels.
- v. The applicant shall not change or alter quantity, quality, the rate of discharge, temperature or the mode of the effluent / emissions or hazardous wastes or control equipments provided for without previous written permission of the Board.
- vi. The applicant shall provide facility for collection of environmental samples and samples of trade and sewage effluents, air emissions and hazardous wastes to the Board staff at the terminal or designated points and shall pay to the Board for the services rendered in this behalf.
- vii. The applicant shall make an application for renewal of the consent at least 60 days before the date of the expiry of the consent.
- viii. The firm shall submit to this office, the 30<sup>th</sup> day of September every year, the Environmental Statement Report for the financial year ending 31<sup>st</sup> March in the prescribed Form-V as per the provisions of rule 14 of the Environment (Protection) (Second Amendment) Rules, 1992.
- ix. An inspection book shall be opened and made available to the Board's officers during their visit to the applicant.
- x. The applicant shall install a separate electric meter showing the consumption of energy for operation of domestic and industrial effluent treatment plants and air pollution control system. A register showing consumption of chemicals used for treatment shall be maintained.
- XI. Separate drainage system shall be provided for collection of trade and sewage effluents. Terminal manholes shall be provided at the end of collection system with arrangement for measuring the flow. No effluent shall be admitted in the pipes / sewers down- stream of the terminal manholes. No effluent shall find its way other than in designed and provided collection System.
- xii. Neither storm water nor discharge from other premises shall be allowed to mix with the effluents from the factory.
11. This consent shall not be construed as any exemption from obtaining necessary No Objection Certificate from other Government agencies as may deemed fit necessary.

12. If CETP does not operate efficiently and problem of pollution occurs, industry should voluntarily stop the production or total effluent should reuse.
13. This consent is issued as per the decision taken in the meeting of the Consent Committee of the Board held on 14/03/2012 and with the approval of Hon'ble Chairman of the Board
14. The industry shall reduce the industrial effluent quantity upto 4072 CMD and 10 % the treated effluent shall be recycled / reused in the process by 31.12.2012.
15. The Capital investment of the industry is 99.91 Crore.  
(Existing C.I. Rs 88.27 Cr + Increased C.I. Rs 11.64 Cr)

  
(Milind Mhaiskar)  
Member Secretary

To,  
M/s Sudarshan Chemical Industries Ltd.  
Plot No. 19 -A/1 & 2, MIDC Mahad,  
Dist- Raigad.

Copy to :

RO, Raigad / SRO, Mahad

-- They are directed to ensure the compliance of consent conditions.  
CAO/Cess Branch/Master file.

Received Consent fee of -

Sr. No.	Amount(Rs.)	DD. No.	Date	Drawn On
01	225000/-	506197	15 Nov 2010	State Bank of India