

MAHARASHTRA POLLUTION CONTROL BOARD

Phone : 4010437/4020781
/4037124/4035273
Fax : 24044532/4024068 /4023516
Email : enquiry@mpcb.gov.in
Visit At : <http://mpcb.gov.in>



Kalpataru Point, 3rd & 4th floor, Sion- Matunga
Scheme Road No. 8, Opp. Cine Planet Cinema, Near
Sion Circle, Sion (E),
Mumbai - 400 022

Red/L.S.I

Date 27/01/2014

Consent No: BO/JD-WPC/NK/R/CC- 821

Consent to Operate under Section 26 of the Water (Prevention & Control of Pollution) Act, 1974 & under Section 21 of the Air (Prevention & Control of Pollution) Act, 1981 and Authorization / Renewal of Authorization under Rule 5 of the Hazardous Wastes (Management, Handling & Transboundary Movement) Rules 2008

[To be referred as Water Act, Air Act and HW (M&H) Rules respectively].

CONSENT is hereby granted to

M/s. Prasad Sugar and Allied Agro Products Ltd,
Vambori, Tal-Rahuri, Dist-Ahmednagar.

located in the area declared under the provisions of the Water Act, Air act and Authorization under the provisions of HW(M&H) Rules and amendments thereto subject to the provisions of the Act and the Rules and the Orders that may be made further and subject to the following terms and conditions:

1. The Consent to Operate is granted for a period up to:31/07/2015.
2. The Consent is valid for the manufacture of -

Sr. No.	Product Name	Maximum Quantity	UOM
1	White Sugar	8600	MT/M
2	Molasses	3000	MT/M
3	Bagasse	23259	MT/M
4	Press Mud	3750	MT/M

3. CONDITIONS UNDER WATER ACT:

- (i) The daily quantity of trade effluent from the factory shall not exceed 450.0 M³.
- (ii) The daily quantity of sewage effluent from the factory shall not exceed 20.0M³.

(iii) Trade Effluent :

Treatment: The applicant shall provide comprehensive treatment system consisting of primary / secondary and/or tertiary treatment as is warranted with reference to influent quality and operate and maintain the same continuously so as to achieve the quality of the treated effluent to the following standards:

1	pH	Between	5.5 to 9.0
2	Oil & Grease	Not to exceed	10 mg/l
3	Suspended Solids	Not to exceed	100 mg/l.
4	BOD 3 Days 27 degree C	Not to exceed	100 mg/l.
5	COD	Not to exceed	250 mg/l.
6	TDS	Not to exceed	2100 mg/l.
7	Sulphates	Not to exceed	1000 mg/l.
8	Chlorides	Not to exceed	600 mg/l

(iv) **Effluent Disposal:** The treated effluent shall be reused/ recycled to the maximum extent and rest shall be used on Land for irrigation within factory premises only. In no case, at any time effluent shall finds its way to any water body directly or indirectly.

(v) **Sewage Effluent Treatment:** The applicant shall provide comprehensive treatment system as is warranted with reference to influent quality and operate and maintain the same continuously so as to achieve the quality of treated effluent to the following standards.

- (1) Suspended Solids Not to exceed 100 mg/l.
(2) BOD 3 days 27o C. Not to exceed 100 mg/l.

(vi) **Sewage Effluent Disposal:** The treated effluent shall be recycled to the maximum extent and remaining shall be used on land for gardening.

(vii) Non-Hazardous Solid Wastes:

Sr. No.	Type Waste	Quantity	UOM	Treatment	Disposal
1	ETP Sludge	1.50	MT/M		Used as filler composting
2	Boiler Ash	3.00	MT/M		Used as filler composting

(viii) **Other Conditions:** Industry should monitor effluent quality regularly.

4. CONDITIONS FOR MOLASSES STORAGE:

- (i) The molasses shall be properly collected and stored in steel tanks which shall be absolutely leak proof. At no stage of handling of molasses, there shall be leakage or spillage.
- (ii) The capacity of tanks for storage of molasses shall be such that at no time the molasses shall be required to be stored in kutchha pits. Adequate space storage capacity shall be available to take care of bumper production of sugar, non-lifting of molasses etc.
- (iii) All the area on which molasses are stored and handled should be provided with drain for diverting the spills to the treatment plant/ molasses tank. Suitable arrangements for accidental discharges of molasses from the tanks shall be provided to contain the same within factory premises.
- (iv) Destruction of molasses and its disposal shall not be done without specific permission in writing from the authorized officer of the Board, intimation of intention to destroy or dispose of the molasses shall be given to the Board atleast 15 (fifteen) days in advance by registered post under intimation to the Sub-Regional officer and Regional officer of the Board under whose jurisdiction the factory is situated.
- (v) The storage tanks shall be kept in good conditions all the year-round with adequate maintenance. The tanks size and capacity per cm, height, total capacity in tonnes shall be displayed prominently near the tank.

(vi) The above conditions shall be in addition to and not in derogation of the provisions contained in the "Bombay Molasses Rules, 1955" and "Maharashtra Molasses Storage and Supply Regulation, 1965".

(vii) The industry should monitor effluent quality regularly.

5. The applicant shall comply with the provisions of the Water (Prevention & Control of Pollution) Cess Act, 1977 (to be referred as Cess Act) and amendment Rules, 2003 there under

The daily water consumption for the following categories is as under:

(i) Domestic purpose	...	30.00 CMD
(ii) Water gets Polluted & Pollutants are Biodegradable	...	270.00 CMD
(iii) Water gets Polluted, Pollutants are not Biodegradable & Toxic	...	0.00 CMD
(iv) Industrial Cooling, spraying in mine pits or boiler feed	...	200.00 CMD

The applicant shall regularly submit to the Board the returns of water consumption in the prescribed form and pay the Cess as specified under Section 3 of the said Act.

6. CONDITIONS UNDER AIR ACT:

(i) The applicant shall install a comprehensive control system consisting of control equipments as is warranted with reference to generation of emission and operate and maintain the same continuously so as to achieve the level of pollutants to the following standards:

a) Control Equipment:

Wet scrubber/ESP of sufficient capacity shall be provided to bagasse fired boiler.

b) Standards for Stack Emissions:

1) SPM	Not to exceed	150 mg/Nm ³
2) SO ₂	Not to exceed	2400 Kg/day

(ii) The applicant shall observe the following fuel pattern:-

Sr. No.	Type Of Fuel	Quantity	UOM
1	Bagasse	600	MT /day

(iii) The applicant shall erect the chimney(s) of the following specifications:-

Sr. No.	Chimney Attached To	Height in Mtrs.
1	Broiler 1 & 2	70.00

(iv) The applicant shall provide ports in the chimney(s) and facilities such as ladder, platform etc. for monitoring the air emissions and the same shall be open for inspection to/and for use of the Board's Staff. The chimney(s) vents attached to various sources of emission shall be designated by numbers such as S-1, S-2, etc. and these shall be painted/ displayed to facilitate identification.

(v) The industry shall take adequate measures for control of noise levels from its own sources within the premises so as to maintain ambient air quality standard in respect of noise to less than 75 dB(A) during day time and 70 dB(A) during night time. Day time is reckoned in between 6 a.m. and 10 p.m. and night time is reckoned between 10 p.m. and 6 a.m.

(vi) Other Conditions:

- 1) The industry should not cause any nuisance in surrounding area.
- 2) The industry should monitor stack emissions and ambient air quality regularly.

7. CREP conditions for Sugar Factory:

(A) Water Management:

- i. Operation of ETP shall be started at least one month before starting of cane crushing to achieve desired MLSS. So as to meet prescribed standards from day one the operation of mill.
- ii. Waste water generation shall be reduced to 100 litres per tone of cane crushed.
- iii. Industry shall achieve zero discharge into in land surface water bodies.
- iv. 15 days storage capacity tank shall be provided for treated effluent to take care of no demand for irrigation.

(B) Emission Control: ESP/Bag filter/Ventury scrubber shall be installed to comply with standards for particulate matter emission to < 150 mg/Nm³.

8. Conditions for D.G. Set

- a. Noise from the D.G. Set should be controlled by providing an acoustic enclosure or by treating the room acoustically.
- b. Industry should provide acoustic enclosure for control of noise. The acoustic enclosure/ acoustic treatment of the room should be designed for minimum 25 dB (A) insertion loss or for meeting the ambient noise standards, whichever is on higher side. A suitable exhaust muffler with insertion loss of 25 dB (A) shall also be provided. The measurement of insertion loss will be done at different points at 0.5 meters from acoustic enclosure/room and then average.
- c. The industry shall take adequate measures for control of noise levels from its own sources within the premises in respect of noise to less than 75 dB(A) during day time and 70 dB(A) during the night time. Day time is reckoned between 6 a.m. to 10 p.m and night time is reckoned between 10 p.m to 6 a.m.
- d. Industry should make efforts to bring down noise level due to DG set, outside industrial premises, within ambient noise requirements by proper siting and control measures.
- e. Installation of DG Set must be strictly in compliance with recommendations of DG Set manufacturer.
- f. A proper routine and preventive maintenance procedure for DG set should be set and followed in consultation with the DG manufacturer which would help to prevent noise levels of DG set from deteriorating with use.
- g. D.G. Set shall be operated only in case of power failure.
- h. The applicant should not cause any nuisance in the surrounding area due to operation of D.G. Set.

9. CONDITIONS UNDER HAZARDOUS WASTE (MANAGEMENT, HANDLING & TRANSBOUNDRY MOVEMENT) RULES, 2008:

(i) The Industry shall handle hazardous wastes as specified below.

Sr. No.	Type Of Waste	Quantity	UOM	Disposal
1	5.1 Used /spent oil	100	Kg/M	used with bagasse as fuel in own boiler

- a. Whenever due to any accident or other unforeseen act or even, such emissions occur or is apprehended to occur in excess of standards laid down, such information shall be forthwith Reported to Board, concerned Police Station, office of Directorate of Health Services, Department of Explosives, Inspectorate of Factories and Local Body. In case of failure of pollution control equipments, the production process connected to it shall be stopped.

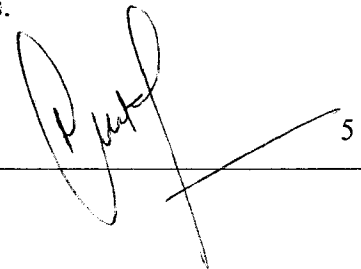
10. Specific conditions (Sugar Industries) with Bank Guarantees along with time bound programme for compliance

Sr. No	CODE	Consent conditions	BG amount	Time for compliance	Compliance report with remarks by SRO
1	SC1 a	The industry shall reduce waste water generation to 100 liters per ton of cane crushed.	--	complied	--
	SC 1 b	Industry to provide online flow meter with datalogger at Inlet of ETP.	--	complied	--
2	SC2 A&B	Upgrade your ----- undersize/oversized units of the Effluent Treatment Plant to adequate capacity.	---	---	---
		Placing the order for upgradation	--	---	--
	SC2 C	Completion and commissioning of upgraded ETP C. Separate Primary ETP to be provided for DM Plant effluent & cooling water	--	complied	--
3	SC 3	Make arrangements to cover the effluent collection and carrying system to avoid the ingress of Bagasse and other material	Five lacs	30.06.2014	31.07.2014
4	SC 4	Adequate land to be made available (owned by self or with bilateral agreement with land owners) for disposal of treated effluent (20 Cubic Meter per acre of Land) to achieve zero discharge into land surface water bodies (Sugar).	---	Adequate land provided	---
5		Industry shall upgrade existing Air pollution control system by	---	---	---
	SC5 A	Providing adequate stack height	--	complied	---
	SC5 B	Providing ESP/Bag Filters/Wet Scrubber as per CREP condition	Eight lacs		
		i) Placing the order for upgradation		30.04.2014	10.11.2013
		ii) Completion and commissioning of upgraded APC for sugar unit		31.12.2014	10.01.2015
	SC5 C	In case for separate Boiler for Co-Gen (for 2nd Boiler)	--	Only sugar unit	--
6	SC 6	Plans to be submitted for Utilization of Fly ash & Bottom ash as per Fly ash Notification	10000/-	30.06.2014	15.07.2014
7	SC 7	O & M for achieving consented standards of Effluent	Five lacs	Monthly	Monthly
8	SC 8	O & M for achieving consented standards of Stack emission		Monthly	Monthly

Industry shall submit the above bank guarantees to the Regional Office, Nashik within 15 days and BG remains valid up to 30.11.2015.

11. This Board reserves the right to review, amend, suspend, revoke etc. this consent and the same shall be binding on the industry.


12. This consent should not be construed as exemption from obtaining necessary NOC/permission from any other Government agencies.


5

13. This consent is issued pursuant to the decision of consent committee meeting of the Board dtd. 15.01.2014.

14. The capital investment of the industry is - Rs. 30/- (existing) + Rs. 7.97/- Crs. (expansion), total CI is Rs. 37.97/- Crs.

For and on behalf of the
Maharashtra Pollution Control Board


(Rajeev Kumar Mital, IAS)
Member Secretary

To,
M/s. Prasad Sugar and Allied Agro Products Ltd,
Vambori, Tal-Rahuri, Dist-Ahmednagar.

Copy to:

1. Regional Officer - MPCB Nashik,
2. Sub -Regional Officer - Ahmednagar,
3. Chief Accounts Officer, MPCB, Mumbai.
4. CC/CAC desk- for record & website updation purposes.

Received Consent fee of -

Sr. No.	Amount(Rs.)	DD. No.	Date	Drawn On
1	75000	228215	24 Feb 2011	SBI Bank
2	30000	231083	21 Oct 2011	SBI Bank
3	75000	231084	21 Nov 2012	SBI Bank
4	88750/-	838421	24.12.2013	SBI Bank